

SCENO-SPOT-SOUND


SCENO-SPOT-SOUND

Its the acoustic comfort associate with the image

Thanks to its acoustic coating SCENO-SPOT-SOUND completely absorbs sound reverberations in your spaces (offices, restaurants, waiting room, classroom, ...) and particularly in the range of the speech output area.

It gives to your spaces well being and comfort. It can be stretched on walls and partitions with a 20mm plenum (space between the wall and the textile).

SCENO-SPOT-SOUND can also be digitally printed with UV inks, without deteriorate phonic features.

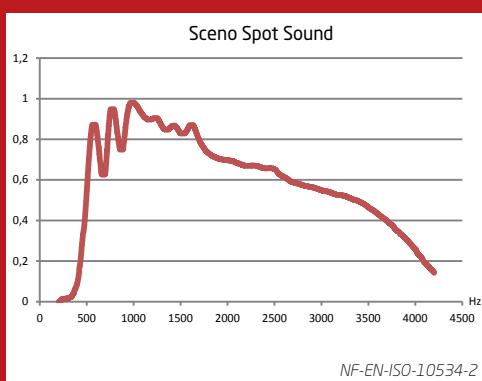

CHARACTERISTICS ET PERFORMANCES

Base cloth	100% Polyester
Coating	Polyurethane
Width	3200 mm 126" / 5100 mm 200"
Weight	150 gr/sqm
Thickness	0,45 mm
Fire classification	NF P/92-503 M1 DIN 4102-1- B1
Tensile strenght	Warp/Weft : 40 daN / 70 daN
Resistance to tear propagation	Warp/Weft : 6,7 Nm / no (pendulum tester 1600 g)
Phonic factor	Alpha w=0,30

NF-EN-ISO-354



SCENEVENT

1 rue de Morat 67601 SELESTAT Cedex - FRANCE
Tel : +33 (0)3 88 85 07 77 - Fax : +33 (0) 03 88 85 04 81
jllutz@chargeurs-substrates.com
www.scenevent.com

